

# Emergency Release System Installation

## Model

304 - 700  
304 - 1700  
304 - 2500


## Part#

46858  
60798  
76019

### ⚠ WARNING ⚠


Read and follow all warnings and installation instructions carefully as outlined in the operator manual. Failure to follow these warnings and instructions may result in severe injury or death.

Fig. 1 Kit Contents

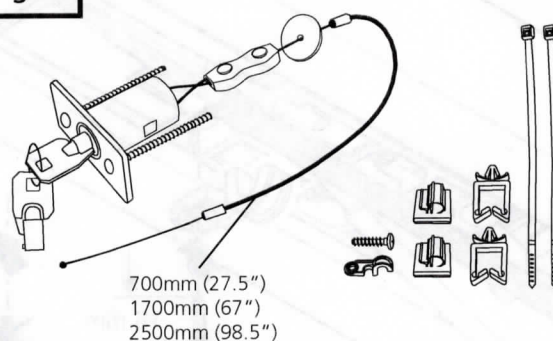

## Lock Installation to Door


Fig. 2

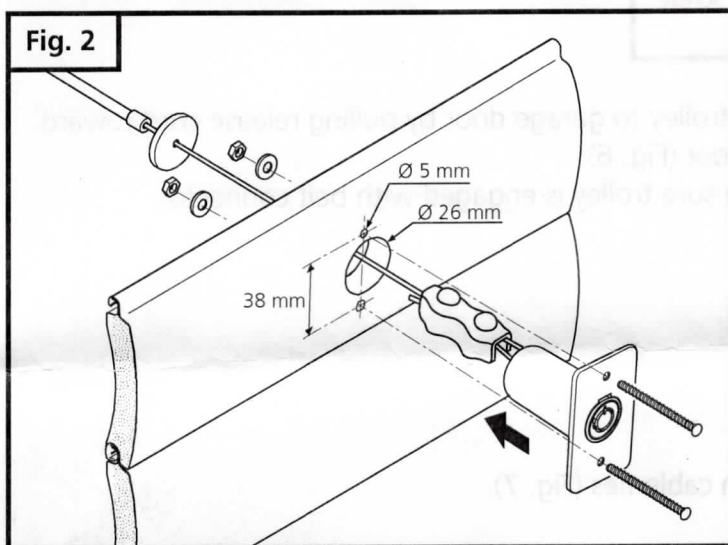

Locate low mounting position on garage door for emergency release system.  
Mark and drill 5mm and 20mm holes per Fig. 2.  
Install and secure lock with hardware provided.

## Emergency Release Cable Installation

Fig. 3

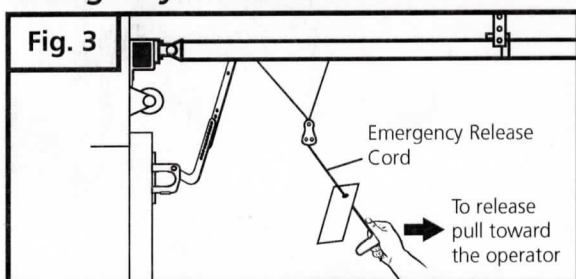


### ⚠ WARNING ⚠

To prevent possible serious injury or death from a falling door, make sure **"ONLY"** disengage the garage door from trolley when garage door is in the **"CLOSE"** position.


Unlock trolley by pulling Emergency release cord toward the operator as shown on Fig. 3.

Fig. 4

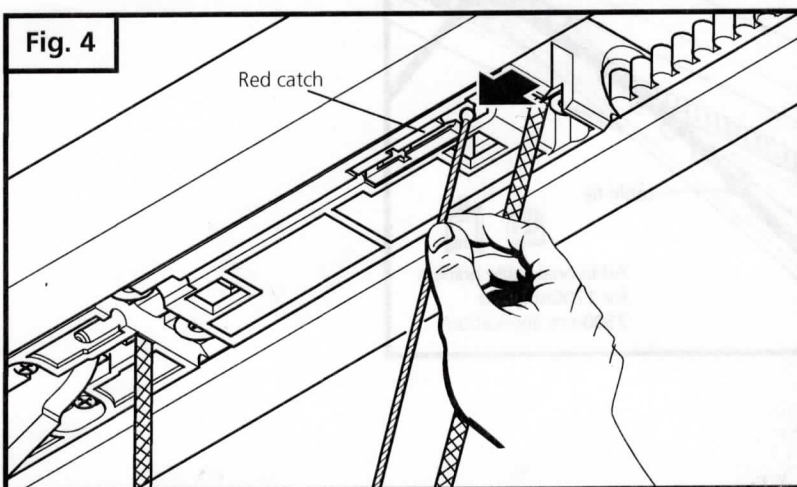


Insert cable in the trolley red catch as shown on Fig. 4.


## Emergency Release Cable Installation cont'd

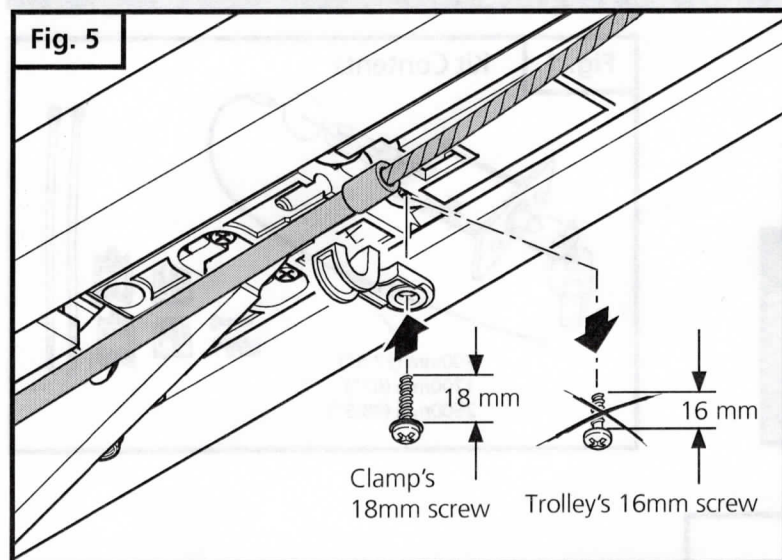

Install cable securement clamp (Fig. 5).  
Make sure to replace trolley's 16mm screw with 18mm screw provided with clamp.

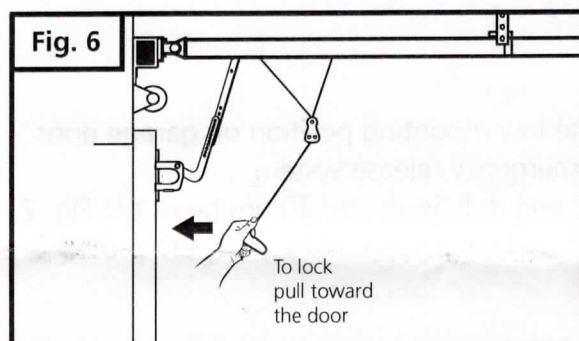

Lock trolley to garage door by pulling release cord toward the door (Fig. 6).  
Make sure trolley is engaged with belt connector.

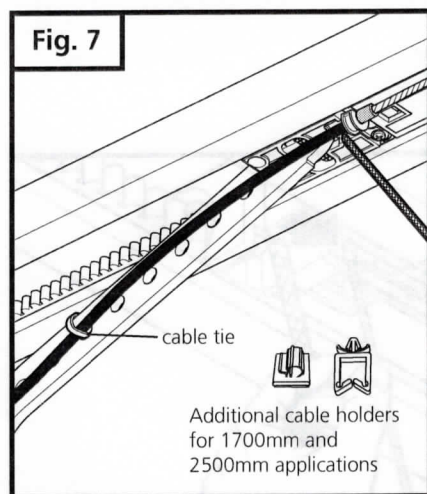

Secure cable with cable ties (Fig. 7).