





DOLKWP300318
Dual Frequency 300/318 MHz Keypad




STEP 1: Set Jumper S1

Determine the operating frequency you will use on your keypad installation. This keypad can operate at either 300 MHz or 318 MHz. At 300 MHz the keypad is compatible with all 300 MHz receivers with 10 dip switches. At 318 MHz the keypad is compatible all 318 MHz receivers with 9 dip switches. (see Figure 1)

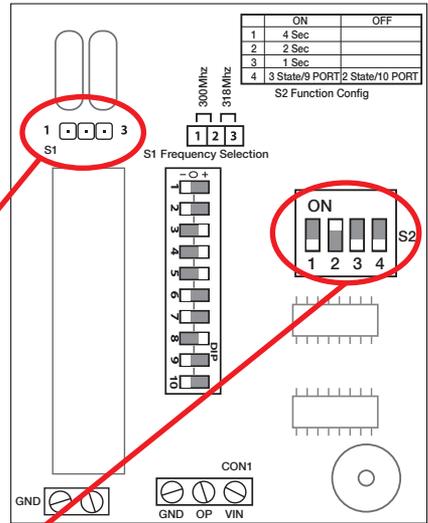


STEP 2: Set Jumper 4 on S2

- 300 MHz (10 dip switches) - Jumper set to OFF (in the DOWN position)




- 318 MHz (9 trinary dip switches) - Jumper set to ON (in the UP position)



STEP 3: Set the DIP switches to match the Receiver

Set the DIP switches of the keypad to “+” for ON or CLOSE, and “-” for OFF or OPEN. Note: Do not use the center position.



STEP 4: Programming the Master Code

1. Press
2. Enter the “Master Code” (default is)
3. Press the button
4. Enter for change code
5. Enter for “Master Code”
6. Enter the new “Master Code” (Must be 4 digits)
7. Press the button. The multi-color status LED flashes Green 3 times meaning the code is accepted. If the multi-color status LED flashes 3 times Red, the steps need to be repeated.

STEP 5: Programming the User Entry Code

1. Press *****
2. Enter the "Master Code" (default is **1 2 3 4**)
3. Press the ***** button
4. Enter **1** for change code
5. Enter **0 1** for the number of user code (eg. "03" for the third user code, etc).
6. Enter the new "User Enter Code" **□ □ □ □** (Must be 4 digits)
7. Press the ***** button. The multi-color status LED flashes Green 3 times meaning the code is accepted. If the multi-color status LED flashes 3 times Red, the steps need to be repeated.

STEP 6: Deleting the programmed User Entry Code

1. Press *****
2. Enter the "Master Code" (default is **1 2 3 4**)
3. Press the ***** button
4. Enter **2** for delete code
5. Enter **0 1** for the number of user code (eg. "03" for the third user code, etc).
6. Press the ***** button. The multi-color status LED flashes Green 3 times meaning the code is accepted. If the multi-color status LED flashes 3 times Red, the steps need to be repeated.

STEP 7: Activating the Keypad

1. Press *****
2. Enter your programmed usercode.

DOLKWP300318 OPERATION

Return to Default Settings

1. Disconnect the power by removing the battery.
2. Press the **1**, **4**, and **7** keys simultaneously.
3. Re-connect the battery to power up the keypad.
4. Release the **1**, **4**, and **7** keys.

Note: The keypad is returned to the default "Master Code" **1 2 3 4**. And all User Entry Codes are deleted.

Multi-color status LED

ORANGE - Key depress



GREEN - Code was entered correctly and the keypad is transmitting

GREEN - Programming Mode

RED - (Flashing 3 times) Error was made in either programming mode or in code entry.


RF Transmit Time Setting on S2

- RF transmit 1 seconds
- RF transmit 2 seconds
- RF transmit 3 seconds
- RF transmit 4 seconds
- RF transmit 5 seconds
- RF transmit 6 seconds
- RF transmit 7 seconds
- RF transmit 0 seconds

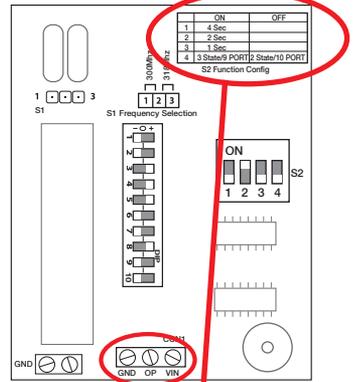

S2 Function Config

	ON	OFF
1	4 Sec	
2	2 Sec	
3	1 Sec	
4	3 State/9 PORT	2 State/10 PORT



DIRECT HARD WIRE:

NOTE: Remove 9V battery

WARRANTY:

The warranty period of this product is 24 months, beginning from the manufacturing date. During this period, if the product does not operate correctly, due to a defective component, the product will be repaired or replaced at the sole discretion of Transmitter Solutions. This warranty does not extend to the product casing which can be damaged by conditions outside of the control of Transmitter Solutions.



7380 S. Eastern Avenue, Suite 124-320 • Las Vegas, NV 89123
 (866) 975-0101 * (866) 975-0404 Fax
www.transmittersolutions.com