

# ANSI Door Strike

ELESTRGK

PassAbility™



## FEATURES

- UL listed
- Easy installation
- Left or right hand installation
- Single or dual voltage
- Fail-secure (power to open) or fail-safe (power to lock) options
- Low maintenance and high reliability
- Fire resistance certified




## SPECIFICATIONS

Operating Voltage	12 VDC, 24 VDC 12/24VDC
Voltage Tolerance	±15%
Current Draw	250 mA/12 VDC 150 mA/24 VDC
Operating Temperature	-14°F ~ +113°F
Humidity	0~95%
Lifetime guarantee	1,000,000 cycles

Accommodates 1/2 inch to 5/8 inch latch bolt. (5/8" with 1/8" door gap)

### FIRE RESISTANCE CERTIFICATE:

This product, its materials and assemblies have been proven to be fire resistant in accordance with the test procedures of Sponsored Investigation FSV 0609 and the terms of clause 4.1 of Australian Standard 1905, Part 1-1997.

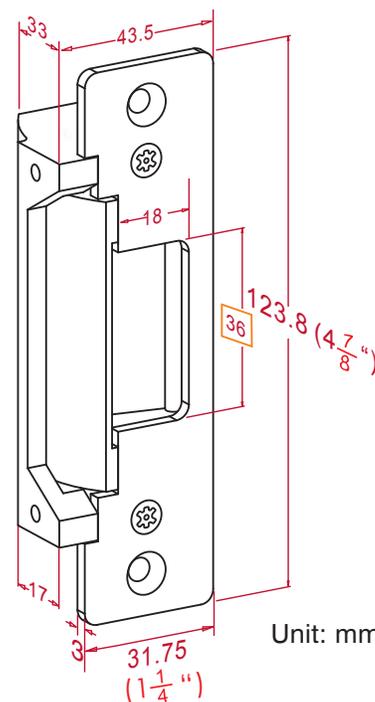

2480 South 3850 West, Suite B  
Salt Lake City, UT 84120  
(866) 975-0101 • (866) 975-0404 fax  
[www.transmittersolutions.com](http://www.transmittersolutions.com)

All items are trademarks of their respective holders.

To have your fax number removed from future specials, please call Removal Services - 800-915-2571 ext. 47540 or fax to 866-975-0404.