



# BRUSH SEAL INSTALLATION INSTRUCTIONS

TOOLS REQUIRED:  
TAPE MEASURE  
HACKSAW  
DRILL - WITH #2 PHILLIPS TIP


KIT INCLUDES:  
48" BRUSH/RETAINER - 4  
54" BRUSH/RETAINER - 2 FOR SINGLE DOOR/4 FOR DOUBLE DOOR  
SELF DRILLING SCREWS

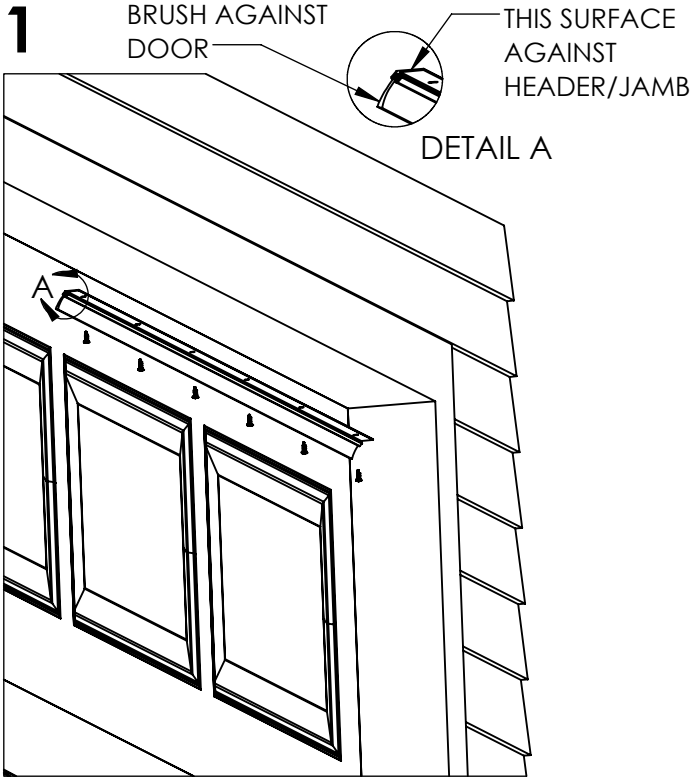


INSTALL 1 54" RETAINER/BRUSH ALONG THE TOP OF THE DOOR WITH SELF DRILLING SCREWS, AS SHOWN, STARTING WITH PART TIGHT TO ONE SIDE. FOR DOUBLE DOOR KIT, INSTALL 2 MORE 54" RETAINER/BRUSH NEXT TO FIRST ONE.

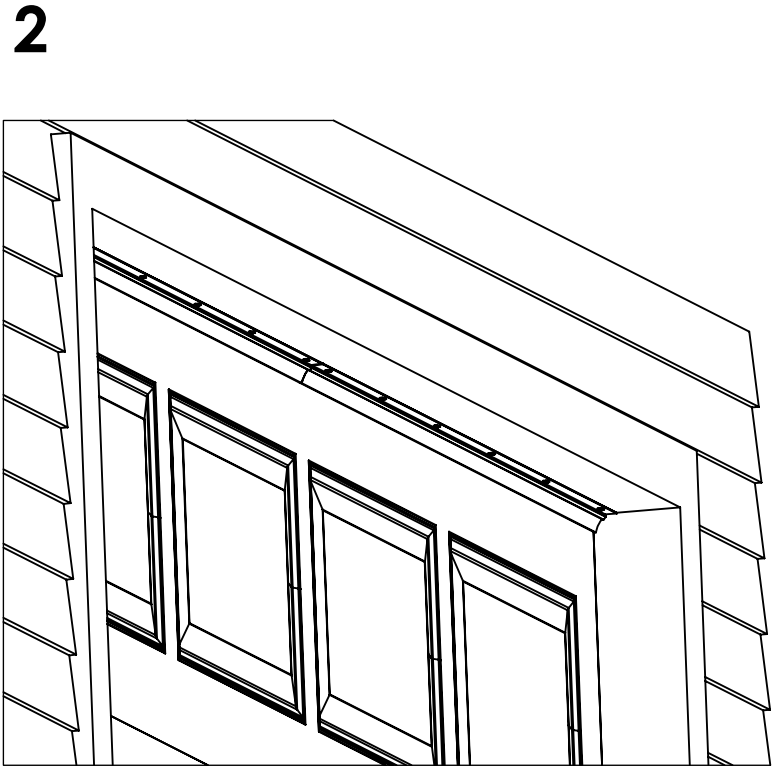

MEASURE FROM PIECE INSTALLED TO SIDE OF OPENING TO DETERMINE LENGTH NEEDED. CUT 1 54" RETAINER/BRUSH TO FIT AND INSTALL, WITH SELF DRILLING SCREWS.

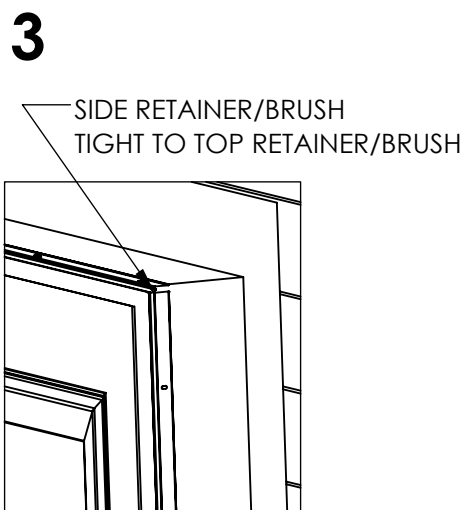

INSTALL 1 48" RETAINER/BRUSH ALONG THE SIDE OF THE DOOR WITH SELF DRILLING SCREWS, AS SHOWN, STARTING WITH PART TIGHT TO TOP RETAINER/BRUSH.

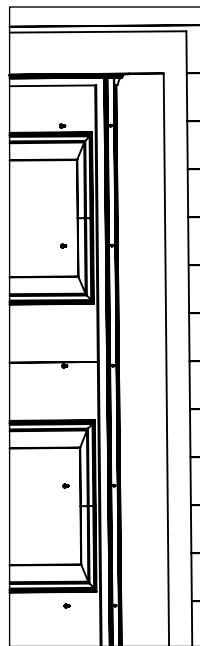

**4**

MEASURE FROM PIECE INSTALLED TO BOTTOM OF OPENING TO DETERMINE LENGTH NEEDED. CUT 1 48" RETAINER/BRUSH TO FIT AND INSTALL, WITH SELF DRILLING SCREWS. REPEAT STEPS 3 AND 4 FOR OTHER SIDE.

