


SG

Vehicular Slide Gate Operator for Commercial and Industrial Applications

Standard Features:

- Available in single or three phase
- Solid State Control Board with diagnostic LEDs to indicate all input & output function
- On board, 3-button control station
- Timer to close with 0-60 second adjustments
- Self adjusting Maximum Run Timer
- Easy left/right changeover
- Heavy duty steel frame with polyethylene rust & dent proof cover

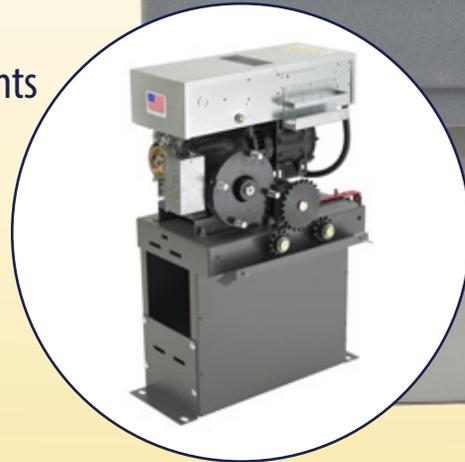

Complete selection of control stations & accessories are available.

All gate operators must have contact and non-contact sensing system installed for operator to work properly and safely.

www.VEpower.net

[Facebook.com/PowerMasterOperators](https://www.facebook.com/PowerMasterOperators)


SERVICING THE INDUSTRY SINCE 1969

SG

Specifications & Features

- Gate speed: 11 inches per second
- Up to 30 cycles per hour
- Can service gates weighing up to 1500 lbs
- Max gate width: 50 ft
- Heavy duty pillow block bearings
- 40:1 gear reducer in oil bath assures smooth and quiet operation
- Rated for Class I - Class IV applications
- Can be paired as Primary/Secondary units (Specify at time of order)
- Post or pad mountable

* **SHIPPING WEIGHT: APPROX. 235 LBS**

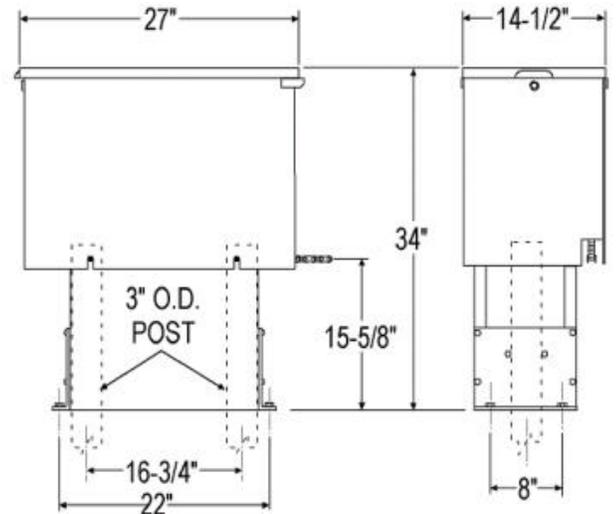

OPTIONAL EQUIPMENT:

- Sensing Edge (contact sensor)
- Photo Cell (non-contact sensor)
- Loop Detector
- Gear Box Heater (for cold climates)
- Warning Equipment (horns, lights)
- Thermostatically controlled cooling fan for cold climates
- Torque limiting clutch
- Steel cover in lieu of polyethylene cover

CAUTION

A moving gate can cause serious injury or death!

Carefully read and follow all safety instructions, precautions, and guidelines when installing and using this product.

Motorized gates are for vehicles only. Pedestrians must use a separate entrance. **NO ONE SHOULD CROSS THE PATH OF A MOVING GATE!**

Proper reversing devices must be installed on gates to avoid all hazards, pinch points and entrapment. Eliminate all hazards, pinch points and entrapment areas.

Warning signs must be permanently installed and visible to traffic and pedestrians.

Do not mount operating devices accessible through gates or between a gate and wall.

Never allow children to lay in the path of a gate. Never allow children to operate or play with the gate controls.

Follow UL 325 and ASTM F220-02 standards.

Do not install this product unless all hazards, pinch points and entrapment points are protected.

