

The CPT Sensing Edge

The Premier "Quick-Fix Service Edge"

Applications

- **Sectional Doors**
- **Rolling Steel Doors**

The New CPT Sensing Edge was developed to provide a superior "Quick-Fix" for sectional and rolling door applications. The new Conductive Polymer Technology Edge easily stores on any service truck and assembles in no time. Combined with our ME123 mounting channels it can be installed on rolling steel doors or sectional doors measuring from 1 1/2" to 2" thick. The CPT is the finest "do-it-yourself" repair or replacement sensing edge solution available today, at an affordable price.

DESIGN FEATURES:

- Build in the field to desired length
- Unique end plug design
- Weather resistant - weather seal
- Easy to install - Cut to fit
- Fits our ME123 mounting channels

TECHNICAL SPECIFICATIONS:

Color: Black

Extrusion Length: Extruded Flexible PVC 50 ft. and 100 ft.

Sensing Edge Size: 1 5/8" H x 1 11/16" W

Sensitivity: nominal 7-12 lbf

Lead Wire: 18" - 22 gauge

Wire Outlet Location: Universal

Wire Configuration: N.O. - Can be N.C.- Contact Factory

Electrical Max: 24V AC/DC

Contact Element: "CPT" Conductive Polymer Technology

Mounting Channel: High-density PVC


Electrical Interface: Sealed Module - Provides seamless connection to "Logic" or "Relay" type operators

Warranty: 2 years on manufactured components only
Failure due to site workmanship is not covered.

ANSI/UL325 Recognized Component



Flexible PVC Extrusion

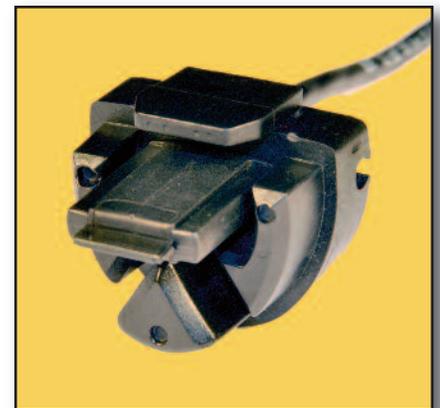

Molded PVC End Plug

Do-It-Yourself
Sensing Solutions by MillerEdge Inc.



With one service call...you can do it all!

P.O. Box 159 • West Grove, PA 19390 • (610)869-4422 • Fax: (610)869-4423 • 800-220-3343
6809 South Harl Avenue, Suite A, Tempe, AZ 85283 • (480)755-3565 • Fax (480)755-3558 • 800-887-3343
www.milleredge.com



Model # CPT-223

SensingEdge


Installation

Place appropriate CPT-223 mounting channel in desired location. Drill 1/8" holes through channel and into mounting surface every 24". Attach channel to surface with screws. Slide CPT-223 Sensing Edge into channel and wire to controls.


Note: For detailed installation and wiring instructions, contact Miller Edge, Inc.

Care of the CPT-223. . .

Minimum care is required for the CPT-223 since it is manufactured with only the most durable materials and the highest quality control standards. However, Sensing Edges should be examined regularly for cuts or punctures which could damage internal components. Check wiring to be sure connections are secure. When properly maintained, the CPT-223 offers years of trouble free operation.



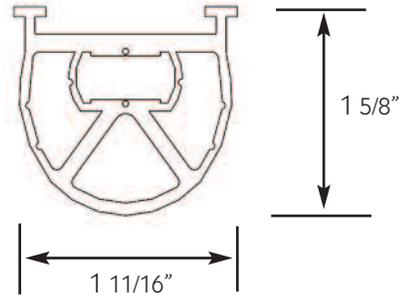


CPT-223 Extrusion

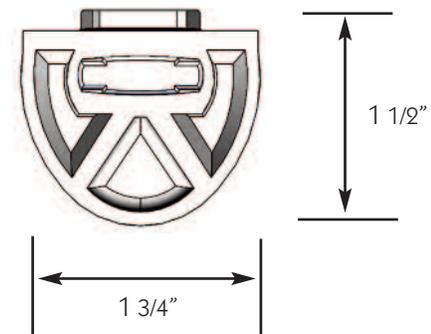

CPT-223 End Plug

Mounting Channels:

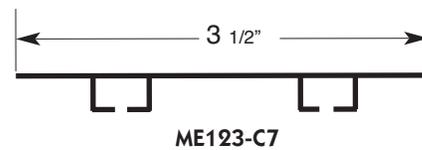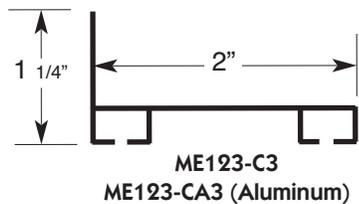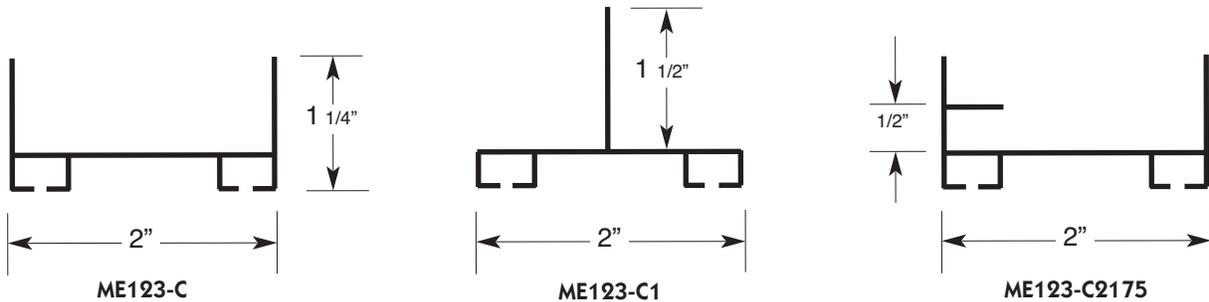

Contact Miller Edge to ensure compatibility with your operating controls.
U.S. Patent #8,832,996 B2

CPT223_Spec_20150223

P.O. Box 159 • West Grove, PA 19390 • (610)869-4422 • Fax: (610)869-4423 • 800-220-3343
6809 South Harl Avenue, Suite A, Tempe, AZ 85283 • (480)755-3565 • Fax (480)755-3558 • 800-887-3343
www.milleredge.com